



Tri-proof Light

Lumen output
Max. 8.400 Lm

Page 121



Tri-proof SP

Lumen output

Page 123



Taurus

Lumen output
Max. 8.400 Lm

Page 125



Tri-proof Round

Lumen output
Max. 8.160 Lm

Page 126



Damp Proof Housing

Lumen output
Max. Lm

Page 128



Sjoc Sport

Lumen output
Max. 22.500 Lm

Page 129



UFO Highway

Lumen output
Max. 42.000 Lm

Page 130



UFO Galaxy

Lumen output
Max. 96.000 Lm

Page 131



Flood Light

Lumen output
Max. 74.400 Lm

Page 132



HiSpot Flood Light

Lumen output
Max. 11.250 Lm

Page 133



HiMast Flood Light

Lumen output
Max. 117.000 Lm

Page 134



HiSmooth Street Light

Lumen output
Max. 18.750 Lm

Page 135



HiSmooth Street Light

Lumen output
Max. 3.750 Lm

Page 137





Sjoc Pullert R

Lumen output
Max. 1.600Lm

Page 139



Sjoc One Pullert

Lumen output
Max. 840 Lm

Page 141



Sjoc Park One

Lumen output
Max. 2.436 Lm

Page 143



Sjoc Pullert F

Lumen output
Max. 840 Lm

Page 144



Jupiter

Lumen output
Max. 2.300 Lm


Page 145



Floodlight Facade

Lumen output
Max. 2.000 Lm

Page 146

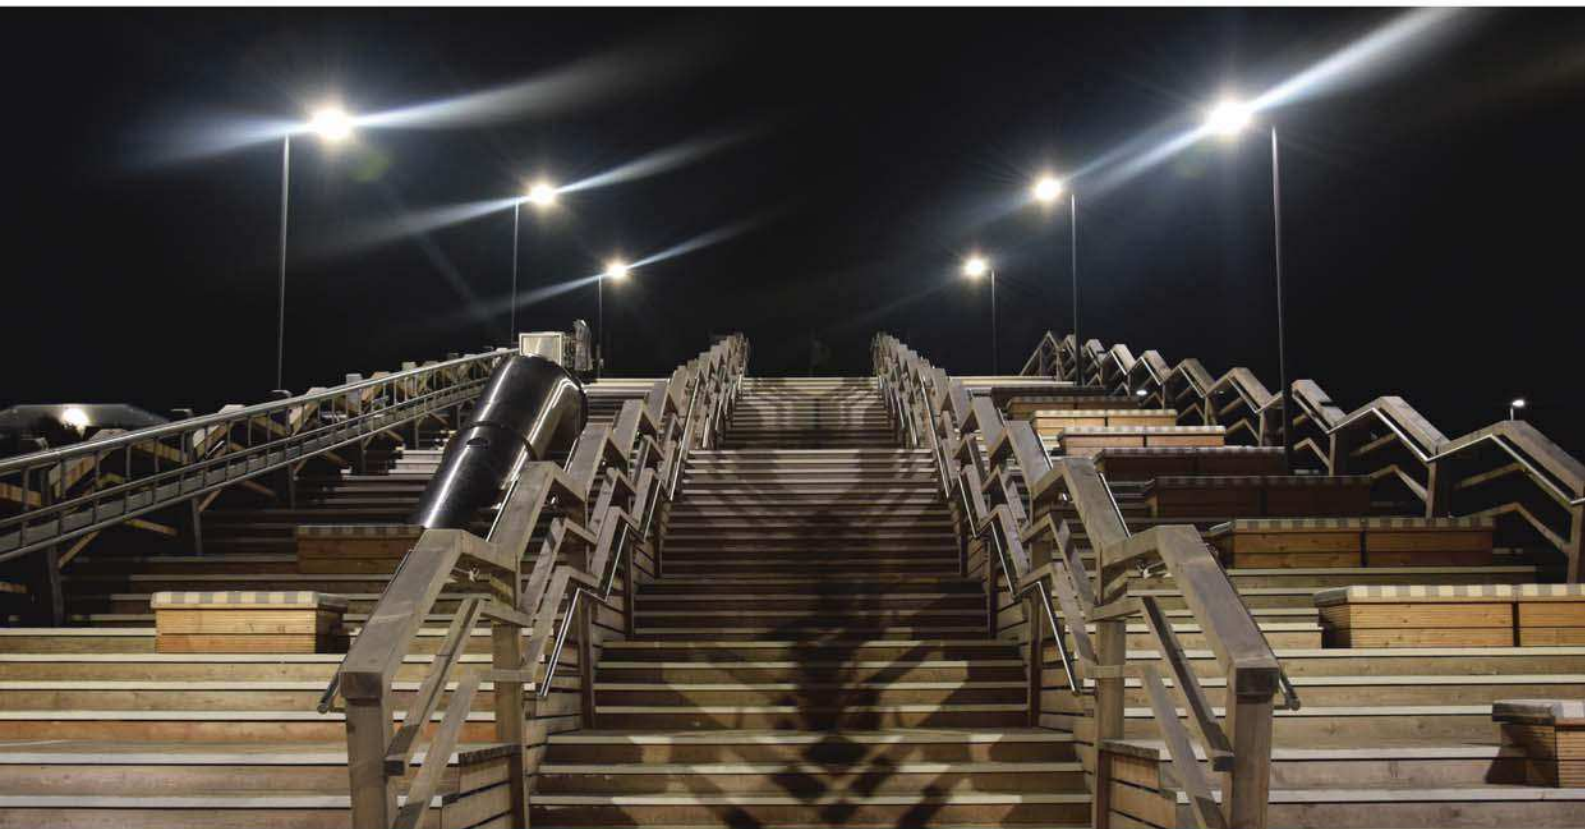

DESCRIPTION

Power /CCT Turnable
 Easy to open without tools
 Tridonic Driver without flicker
 Luminous efficacy 140Lm/W
 Can be linkable
 Fast fit and zero maintenance
 Emergency / Microwave available
 Detection zone: Max.(D x H):
 12m x 6m
 Max. Mounting height : 6m
 Hold time: 5s/30s/90s/3min/20-
 min/30min
 Motion detection: 0.5~3m/s
 Detection sensitivity: 10% / 25%
 / 50% / 75% / 100%
 Daylight sensor: 2lux / 10lux /
 25lux / 50lux / Disable
 Single or double wiring
 Material: Aluminium board, PC
 cover

Certificates: CE/RoHS

Colors: White




AREA OF USE

Replaces fluorescent NCF fittings.
 Warehouse and factories, car parks, sports facilities and food storage. Outdoor & indoor locations

CAN BE DELIVERED WITH:

CCT setting: 3000K/4000K/5000K



| | A | B | C |
|----------|------|----|----|
| 70000 | 600 | 84 | 63 |
| 70005/25 | 1200 | 84 | 63 |
| 70010/30 | 1500 | 84 | 63 |
| 70040 | 2400 | 84 | 63 |

| TYPE | CRI | LIGHT OUT | POWER | KELVIN |
|-------|--------|-----------|--------------|-----------|
| 70000 | >80 Ra | 140 Lm/W | 22 W | 3/4/5000K |
| 70005 | >80 Ra | 140 Lm/W | 38/44/48/52W | 3/4/5000K |
| 70010 | >80 Ra | 140 Lm/W | 40/50/55/60W | 3/4/5000K |
| 70025 | >80 Ra | 140 Lm/W | 40 W | 3/4/5000K |
| 70030 | >80 Ra | 140 Lm/W | 40 W | 3/4/5000K |
| 70040 | >80 Ra | 140 Lm/W | 100 W | 3/4/5000K |



DESCRIPTION

Power adjustable & CCT adjustable via DIP switch.
Luminous efficacy 150Lm/W
Max. Mounting height: 15m

Plug & Play Battery for Emergency: Easy for maintenance.
Emergency driver: Self-testing ,long lifespan.
PC diffuser: Won't yellowing after time goes by.
Sensor ready: Plug-play ,flexible solution.

Can be linkable.
Much bigger space for wiring.
Loop in-out wiring: 3pcsX 2.5mm² cables+ 2pcsX 1.5mm² cables go through
Built in sensor: Motion sensor + Daylight sensor

Certificates: CE/RoHS

Colors: White



Sensor base reserved in lamp



Sensor plug-play



| | A | B | C |
|-------|------|-----|----|
| 70060 | 1200 | 102 | 54 |
| 70065 | 1500 | 102 | 54 |
| 70070 | 1200 | 102 | 54 |



AREA OF USE

Warehouse and factories, car parks, sports facilities and food storage. Outdoor & indoor locations

CAN BE DELIVERED WITH:

- 25-65W Power adjustable
- 4000-5000-6500K CCT adjustable
- Type 1: PIR sensor + Daylight threshold
- Type 2: Microwave + daylight threshold
- Type 3: Microwave + daylight Harvesting
- Type 4: Microwave + Bluetooth control

| TYPE | DIMMING | LIGHT OUT | POWER | COLOR TEMP |
|-------|---------------------------------------|-----------|--------------|------------|
| 70060 | Non-dim | 150Lm/W | 25-35-40-50W | Switchable |
| 70065 | Non-dim | 150Lm/W | 25-35-40-50W | Switchable |
| 70070 | DALI | 150Lm/W | 60 W | 4000K |
| 70365 | Microwave + daylight threshold Sensor | | | |
| 70367 | Remote Control | | | |
| 70380 | Sensor base | | | |
| 70381 | Hanging Clip suspension | | | |
| 70382 | Hanging Clip for suspension | | | |




DESCRIPTION

Easy to open without tools
 Driver: Philips/Lifud
 Light source: Bridgelux LED
 Power factor: >0.9
 Luminous efficacy 140lm/W
 Can be linkable
 Fast fit and zero maintenance
 Max. Mounting height: 6m
 Material: Aluminium board, PC cover

Certificates: CE

Colors: White

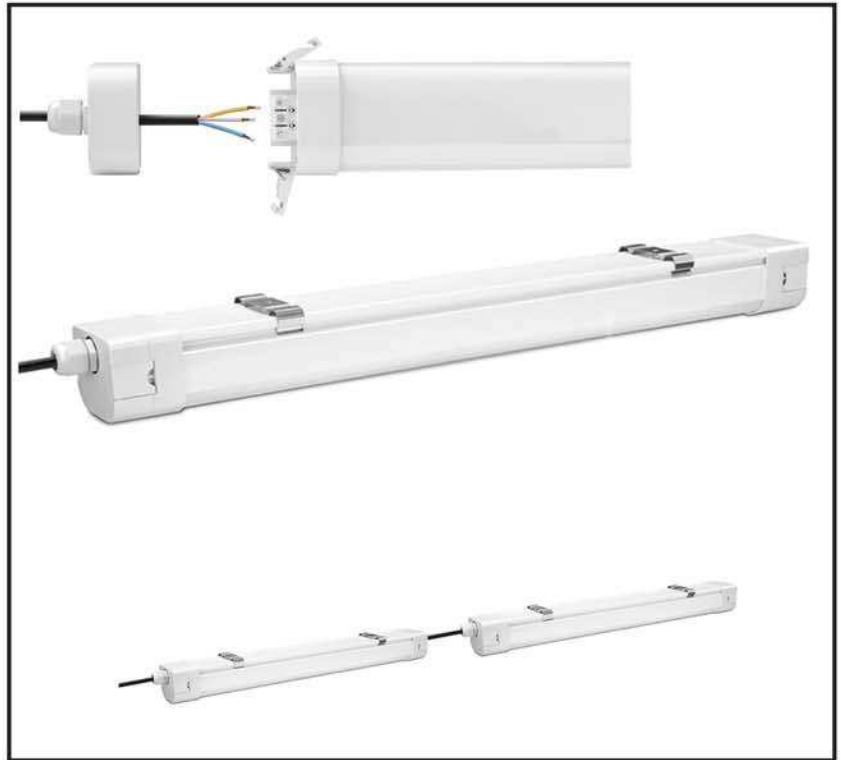


AREA OF USE

Replaces fluorescent NCF fittings.
 Warehouse and factories, car parks, sports facilities and food storage. Outdoor & indoor locations

| | A | B | C |
|----------|------|----|----|
| 70080-81 | 1221 | 74 | 64 |
| 70082-83 | 1502 | 74 | 64 |

| TYPE | CRI | LIGHT OUT | POWER | KELVIN |
|-------|--------|-----------|-------|------------|
| 70080 | >80 Ra | 4200 lm | 30 W | 4000/5000K |
| 70081 | >80 Ra | 5600 lm | 40 W | 4000/5000K |
| 70082 | >80 Ra | 6300 lm | 45 W | 4000/5000K |
| 70083 | >80 Ra | 8400 lm | 60 W | 4000/5000K |

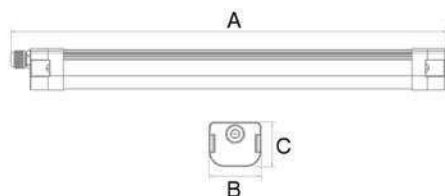

DESCRIPTION

Tri-proof Round is ingress protected and air-tight, which makes it suitable for versatile application.

Light efficacy: 170 lm/W (140 lm/W at +25°C)

Heat management: Passive heat sink in aluminium
 Housing: Polymethyl methacrylate
 End caps, bracket: 316 stainless steel

IP69K can stand 1450psi high pressure wash-down.
 High temperature resistant black rubber wire.
 Dimmable function available.
 Wall, ceiling and suspending mounting


Certificates:
 CE/RoHS/ENEC/DLG

Beam angle 120°

Colors: White



PHOTOMETRIC CURVE

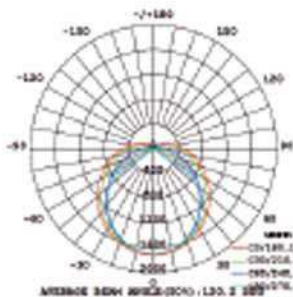

| | A | B | C |
|-------------|------|----|----|
| 70090+70092 | 1200 | 70 | 70 |
| 70091+70093 | 1500 | 70 | 70 |


AREA OF USE


Food industry, Agriculture(Farm, Cold storage ...), Swimming pool, Tire production, Train station/subway /airport etc.

CAN BE DELIVERED WITH:

DALI, 0/1-10V, Microwave sensor options

| TYPE | CRI | LIGHT OUT | POWER | WIRE THROUGH LINKAB. |
|-------|--------|-----------|-------|----------------------|
| 70090 | >80 Ra | 6120 lm | 36 W | No |
| 70091 | >80 Ra | 8160 lm | 48 W | No |
| 70092 | >80 Ra | 6120 lm | 36 W | Yes |
| 70093 | >80 Ra | 8160 lm | 48 W | Yes |



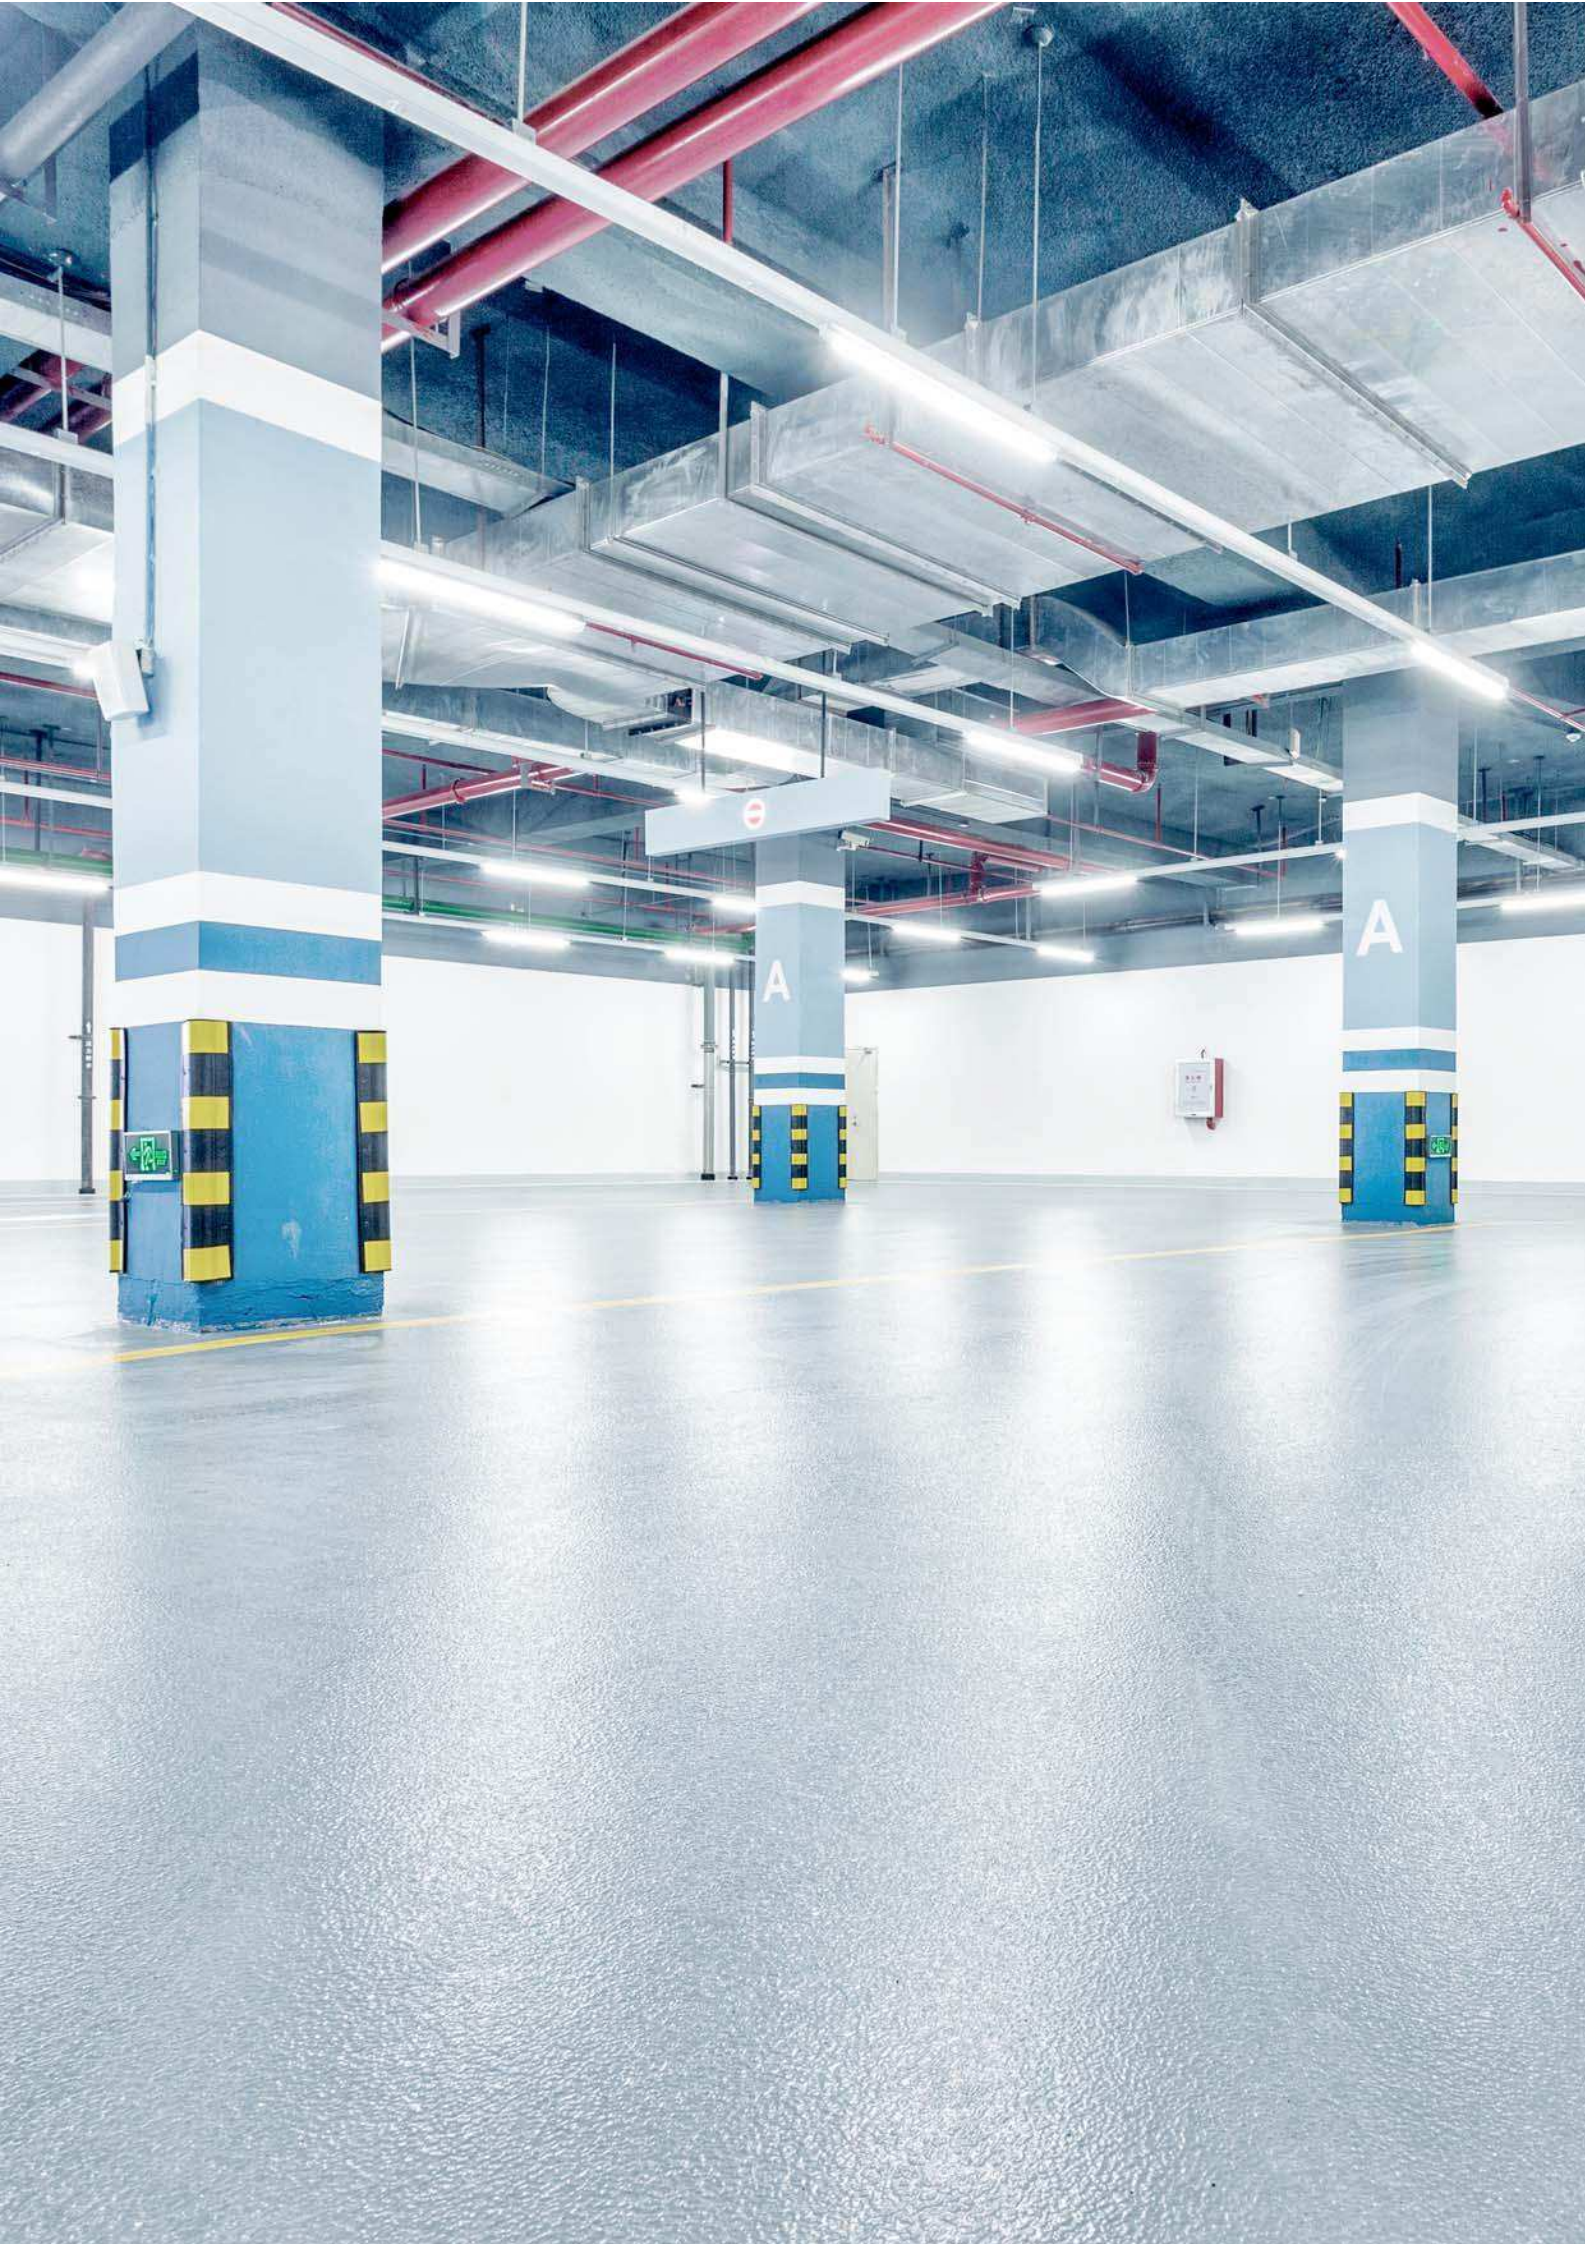

Damp Proof Housing

DESCRIPTION

Wired for quick installation of 230V LED tubes.
 Robust luminaire housing.
 Easy and fast installation
 Luminaire housing, available for 1 or 2 T8 LED light sources
 Protection class: IP65
 Suitable for SubstiTUBE EM / UN and SubstiTUBE Connected
 All necessary accessories are included

Certificates: CE/TÜV/SAA/RoHS

Colors: Grey



AREA OF USE

Replaces fluorescent NCF fittings.
 Warehouse and factories, car parks, sports facilities and food storage.
 Outdoor & indoor locations.

| | A | B | C |
|------|------|----|-----|
| 1xT8 | 600 | 75 | 64 |
| 2xT8 | 600 | 75 | 103 |
| 1xT8 | 1200 | 75 | 64 |
| 2xT8 | 1200 | 75 | 103 |
| 1xT8 | 1500 | 75 | 64 |
| 2xT8 | 1500 | 75 | 103 |

| TYPE | Name | Socket type |
|-------|------------------------|-------------|
| 70100 | 1xT8 Damp Proof 600mm | G13 |
| 70101 | 2xT8 Damp Proof 600mm | G13 |
| 70102 | 1xT8 Damp Proof 1200mm | G13 |
| 70103 | 2xT8 Damp Proof 1200mm | G13 |
| 70104 | 1xT8 Damp Proof 1500mm | G13 |
| 70105 | 2xT8 Damp Proof 1500mm | G13 |



DESCRIPTION

Industrial Linear Lighting
Easy wiring, power switchable.

Housing made of die cast aluminium.

Build-in sensor: Motion sensor+Daylight sensor

Emergency battery
Self-Diagnostic emergency driver: Automatic monthly and annual testing
Emergency wattage:9W
Time: 3 hours

Luminous efficacy: 150 Lm/W
Max. wattage: 150W

Certificates: CE/RoHS/CB

Beam angle 60°/90°/120°

Colors: Light grey



Anti Glare



Ball proof




AREA OF USE

Warehouse, Factory with sensor, Indoor court

CAN BE DELIVERED WITH:

Non-Dim or DALI

| | A | B | C |
|---------|------|-----|----|
| 70880 | 1205 | 107 | 65 |
| 70881-6 | 1460 | 107 | 65 |



| TYPE | CRI | LIGHT OUT | POWER | DIMMING |
|-------|-----------|-----------|-----------------------|-------------------------|
| 70880 | >80 Ra | 150 lm/W | 30-36-45-50W adj. | Non-Dim |
| 70881 | >80 Ra | 150 lm/W | 50-58-65-75W adj. | Non-Dim |
| 70882 | >80 Ra | 150 lm/W | 100-120-130-150W adj. | Non-Dim |
| 70883 | >80 Ra | 6000 lm | 40 W | DALI |
| 70884 | >80 Ra | 11250 lm | 75 W | DALI |
| 70885 | >80 Ra | 1500 lm | 100 W | DALI |
| 70886 | >80 Ra | 22500 lm | 150 W | DALI |
| 70887 | L. 1205mm | | | Grid for Sport lighting |
| 70888 | L. 1460mm | | | Grid for Sport lighting |
| 70889 | | | | Mounting set |

UFO highbay

DESCRIPTION

Environmental protection: no lead, mercury or other pollution elements Contained, no pollution to the environment;
 Long service life: 50.000h
 Unique patented thermal management design to ensure low LED junction temperature.
 Extremely light weight to enhance the safety use and installation
 Low power consumption, long lifespan, good stability, high reliability
 Compared with the filament lamp of the same light effect, 80% reduction in energy consumption.
 Novel design, elegant and beautiful, with modern lighting features, easy to install and adjust

Certificates: CE/TÜV/SAA/RoHS

Beam angle: 60°/90°/120°



LED

5
YEARS WARRANTY

CE

50000h

L 80
B 10


MacAdam
3

IP
65


ON OFF
>100000

120-277V
50/60Hz

PHOTOMETRIC CURVE

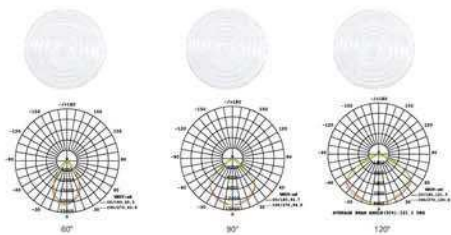

| | A | B | C | D |
|----------|-----|-----|------|-----|
| 70-150W | 138 | 176 | Ø289 | 286 |
| 200-240W | 149 | 187 | Ø325 | 320 |

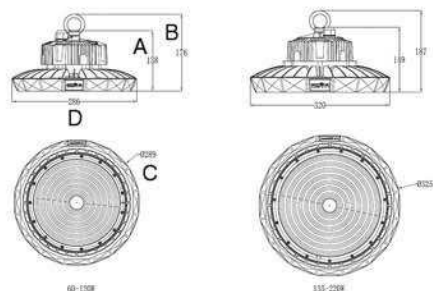

AREA OF USE

Loading bays & forecourts, factories & warehouses, indoor & outdoor carparks, access areas, sidewalk, etc

Anti-glare cover



Aluminum lampshade 60° 90°



PC lampshade 100°

| TYPE | CRI | LIGHT OUT | POWER | COLOR TEMP |
|-------|--------|-----------|-------|-----------------|
| 70300 | >80 Ra | 12250 lm | 70 W | 4000/5000/5700K |
| 70310 | >80 Ra | 15750 lm | 90 W | 4000/5000/5700K |
| 70320 | >80 Ra | 19250 lm | 110 W | 4000/5000/5700K |
| 70330 | >80 Ra | 26250 lm | 150 W | 4000/5000/5700K |
| 70340 | >80 Ra | 35000 lm | 200 W | 4000/5000/5700K |
| 70350 | >80 Ra | 42000 lm | 240 W | 4000/5000/5700K |

DESCRIPTION

This high bay is designed with large size but light-weight. Heat sink helps the body better heat dissipation, and makes sure lifespan. Multiple beam angles adjustable for different installation height. Lumen output is selectable, one fixture for four wattage. UFO Galaxy is suitable for both wholesales and contract channel. PC and ALU Reflectors are available. Compatible with PIR & Microwave motion sensor

Luminous efficacy 150lm/W

Certificates: CE/SAA/RoHS

Colors: Black




| | | | | | | | |
|------------|-------------------------|-----------|--------|----------------|--------|------------------|------------|
| LED | 5 YEARS WARRANTY | CE | 80000h | MacAdam 3 | IK 07 | IP 42 | Hg 0.0mg |
| | | | | ON OFF >100000 | UGR 28 | 200-240V 50/60Hz | ADJUSTABLE |


PHOTOMETRIC CURVE





NARROW



MEDIUM



WIDE



AREA OF USE

Warehouse, Industrial Facility, Exhibition Center, Shopping Mall, Gymnasium, Airport, Toll Station etc.

CAN BE DELIVERED WITH:

4000K/5000K (3000K optional)

| TYPE | CRI | POWER | LIGHT OUT | COLOR TEMP |
|-------|-------------------------------------------------|------------------|---------------|------------|
| 70361 | >80 Ra | 100-120-150-200W | 15000-30000lm | 4000K |
| 70362 | >80 Ra | 100-120-150-200W | 15000-30000lm | 5000K |
| 70363 | UFO Galaxy PC Reflector | | | |
| 70364 | UFO Galaxy Alu Reflector 65 deg. | | | |
| 70365 | UFO Galaxy Plug and Play Motion sensor 100-200W | | | |
| 70366 | UFO Galaxy Plug and Play PIR sensor 100-200W | | | |
| 70367 | UFO Galaxy Remote control | | | |
| 70368 | UFO Galaxy PC Cover for Reflector | | | |
| 70369 | UFO Galaxy Alu Reflector 90deg | | | |

Flood Light

INDUSTRIAL LIGHTING
LED
OUTDOOR LIGHTING

DESCRIPTION

Full waterproof design.
Multi-Chip on lead frame, single module LED package design. System design integrating power supply, LED light engine and heat sink.

Over Current, Over Voltage, Over Heat, Thunder Protection
Fast response (no delay), No mercury vapour, No radiation.

Billboard support (for mounting the floodlight) is available on request.
The floodlight can mounted on the roof, wall, ground etc.
Wire out from vacancy of the support end.


Certificates: CE/TÜV/SAA/RoHS

Colors: Black




| | | | | | | | |
|-------------------|-------------------------|------------|--------|--------------|---------------|----------|-------------|
| LED | 5 YEARS WARRANTY | CE | 50000h | L 80 B 10 | MacAdam <4 | IP 65 | Hg 0.0mg |
| ON OFF >100000 | | 80% ≤1S | | 120° | | | |

PHOTOMETRIC CURVE



| | A | B | C | D |
|-------|-----|-----|-----|----|
| 70900 | 188 | 132 | 112 | 45 |
| 70910 | 234 | 182 | 150 | 52 |
| 70920 | 278 | 230 | 195 | 62 |
| 70930 | 362 | 286 | 236 | 70 |



AREA OF USE

Loading bays & forecourts, factories & warehouses, indoor & outdoor carparks, access areas, roadway, pathway, sidewalk etc.

| TYPE | CRI | LIGHT OUT | POWER | COLOR TEMP |
|-------|--------|-----------|-------|------------|
| 70900 | >80 Ra | 700 lm | 10 W | 3000K |
| 70910 | >80 Ra | 1500 lm | 20 W | 3000K |
| 70920 | >80 Ra | 2250 lm | 30 W | 3000K |
| 70930 | >80 Ra | 3750 lm | 50 W | 3000K |
| 70940 | >80 Ra | 7500 lm | 100 W | 3000K |
| 70950 | >80 Ra | 11250 lm | 150 W | 3000K |

DESCRIPTION

Designed for small and medium sized stadiums and plaza applications

Aerodynamic flow

The radiator is so effective that it allows the air to circulate without producing any resistance

10KV Surge Protection
Corrosion resistant


Certificates: CE/SAA/RoHS

Colors: Black




| | | | | | | | |
|------------|-------------------------|-----------|--------|----------------------------|--------------------------------|------------------------|--------------------|
| LED | 5 YEARS WARRANTY | CE | 50000h | L 80 B 10 | MacAdam <5 | IP 66 | Hg 0.0mg |
| | | | | | | | IK 08 |

PHOTOMETRIC CURVE



| | A | B | C |
|----------|-----|-----|----|
| 40-80W | 359 | 308 | 82 |
| 100-150W | 413 | 366 | 83 |
| 180-240W | 462 | 452 | 87 |

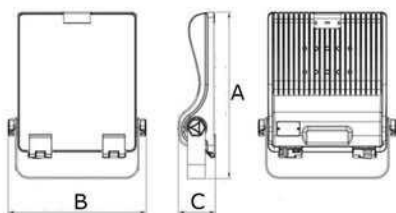

AREA OF USE

For recreational sports, tennis courts, basketball courts, billboard lighting, parking lots etc.

CAN BE DELIVERED WITH

3000K
5000K

| TYPE | CRI | LIGHT OUT | POWER | COLOR TEMP |
|-------|--------|-----------|-------|------------|
| 71000 | >80 Ra | 5400 lm | 40 W | 4000K |
| 71010 | >80 Ra | 8100 lm | 60 W | 4000K |
| 71020 | >80 Ra | 10800 lm | 80 W | 4000K |
| 71030 | >80 Ra | 13500 lm | 100 W | 4000K |
| 71040 | >80 Ra | 16200 lm | 120 W | 4000K |
| 71050 | >80 Ra | 20250 lm | 150 W | 4000K |
| 71060 | >80 Ra | 24300 lm | 180 W | 4000K |
| 71070 | >80 Ra | 27000 lm | 200 W | 4000K |
| 71080 | >80 Ra | 32400 lm | 240 W | 4000K |

HiMast Flood light

LED INDUSTRIAL LIGHTING OUTDOOR LIGHTING

DESCRIPTION

HiMast comes with a waterproof rubber ring inside. And its well-designed radiating fins help accelerate airflow and avoid water accumulating. Each LED module is equipped with a respirator to prevent water vapor. Additionally, HiMast gets IK08 impact-resistant grade, which provides better protection for outdoor usage.

HiMast adopts small beam angle optics (18° and 30°). And with the high efficacy 130lm/W, it can reach a quite far target lighting area as wished.

Each module (300W) is made by aluminum alloy with superior heat dissipation performance, and tempered glass, and plug-and-play waterproof cable connector. Installation can be finished just by using a 6mm hexagonal screwdriver.


Certificates: CE/SAA/RoHS

Colors: Black




| | | | | | | | |
|------------|-------------------------|-----------|---------------|------------------|----------------------|--------------|-----------------|
| LED | 5 YEARS WARRANTY | CE | 50000h | L 80 B 10 | MacAdam <5 | IP 66 | Hg 0.0mg |
| | | | | | | | IK 08 |

PHOTOMETRIC CURVE

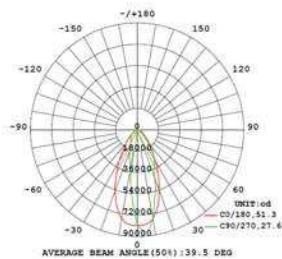

| | A | B | C |
|-------|-----|-----|-----|
| 71100 | 525 | 288 | 173 |
| 71110 | 564 | 598 | 401 |
| 71120 | 792 | 598 | 401 |

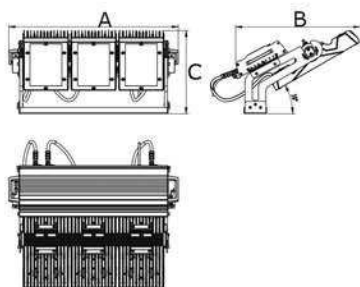

AREA OF USE

For outdoor use. Football stadiums, training courses, running tracks etc.

CAN BE DELIVERED WITH

3000K
5000K

| TYPE | CRI | LIGHT OUT | POWER | COLOR TEMP |
|-------|--------|------------|-------|------------|
| 71100 | >80 Ra | 39.000 lm | 300 W | 4000K |
| 71110 | >80 Ra | 78.000 lm | 600 W | 4000K |
| 71120 | >80 Ra | 117.000 lm | 900 W | 4000K |

DESCRIPTION

Smooth Design

Smooth body would not accumulate dust, sand, or other solid material, and would minimize environment impact for fixture performance.

Surface Treatment

Anti-static and anti-UV outdoor using powder coating

Easy Maintenance

Buckle for fixing heat sink could be opened without tools. There is a supporting bracket to hold upper and lower parts of fixture body, when electricians open for maintaining.

Easy Replacement for LED Driver

The LED driver is fixed by buckles, can be installed or removed easily


Power-off Protection

Power would automatically be off once the fixture body opened.


Color: Silver



PHOTOMETRIC CURVE

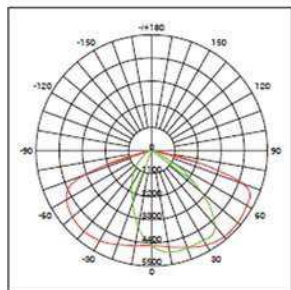

| | A | B | C |
|----------|-----|-----|-----|
| 71200-30 | 763 | 352 | 617 |
| 71240-90 | 680 | 282 | 533 |

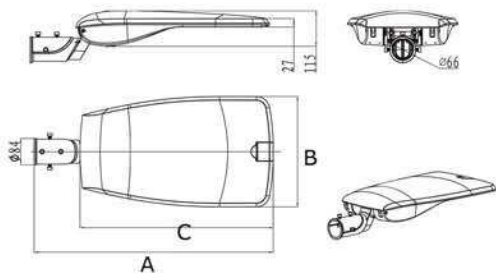

AREA OF USE

Suitable for wide range of road applications. For main roads, collecting roads, roundabouts

CAN BE DELIVERED WITH

3000K, 5000K
Daylight sensor, Time control, Solar control

ACCESSORIES

Spigot 76/90mm
Twin bracket



| TYPE | CRI | LIGHT OUT | POWER | COLOR TEMP |
|-------|--------|-----------|-------|------------|
| 71200 | >70 Ra | 3750 lm | 30 W | 4000K |
| 71210 | >70 Ra | 6000 lm | 50 W | 4000K |
| 71220 | >70 Ra | 8400 lm | 70 W | 4000K |
| 70230 | >70 Ra | 9900 lm | 90 W | 4000K |
| 70240 | >70 Ra | 3900 lm | 30 W | 4000K |
| 70250 | >70 Ra | 6500 lm | 50 W | 4000K |
| 70260 | >70 Ra | 9100 lm | 70 W | 4000K |
| 70270 | >70 Ra | 11700 lm | 90 W | 4000K |
| 70280 | >70 Ra | 15600 lm | 120 W | 4000K |
| 70290 | >70 Ra | 18750 lm | 150 W | 4000K |



DESCRIPTION

Smooth Design

Smooth body would not accumulate dust, sand, or other solid material, and would minimize environment impact for fixture performance.

Surface Treatment

Anti-static and anti-UV outdoor using powder coating

Easy Maintenance

Buckle for fixing heat sink could be opened without tools. There is a supporting bracket to hold upper and lower parts of fixture body, when electricians open for maintaining.

Easy Replacement for LED Driver

The LED driver is fixed by buckles, can be installed or removed easily


Power-off Protection

Power would automatically be off once the fixture body opened.


Color: Silver



PHOTOMETRIC CURVE

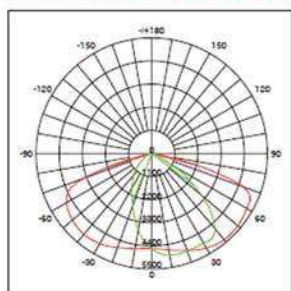

| | A | B | C |
|-----------------|-----|-----|---|
| 71292/95/98 613 | 222 | 159 | |

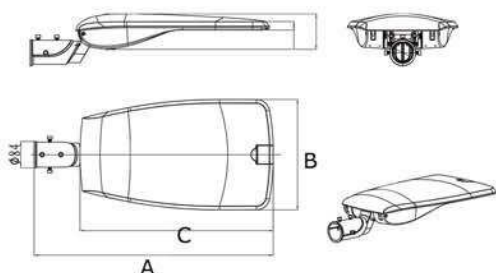

AREA OF USE

Suitable for wide range of road applications. For main roads, collecting roads, roundabouts

CAN BE DELIVERED WITH

3000K, 5000K
Daylight sensor, Time control, Solar control

ACCESSORIES

Spigot 76/90mm
Twin bracket



| TYPE | CRI | LIGHT OUT | POWER | COLOR TEMP |
|-------|--------|-----------|-------|------------|
| 71292 | >70 Ra | 1875 lm | 15 W | 4000K |
| 71295 | >70 Ra | 2500 lm | 20 W | 4000K |
| 71298 | >70 Ra | 3750 lm | 30 W | 4000K |




DESCRIPTION

Bollard lights are one of the most attractive lighting options available to homes and businesses for landscape lighting as they are offered in a variety of styles, colors, and materials. Whether you are looking to add attractive ambient lighting to your property, improve your home security by increasing visibility, or to mark walkways, driveways and pathways.

Certificates: CE/TÜV/RoHS

Color: Black

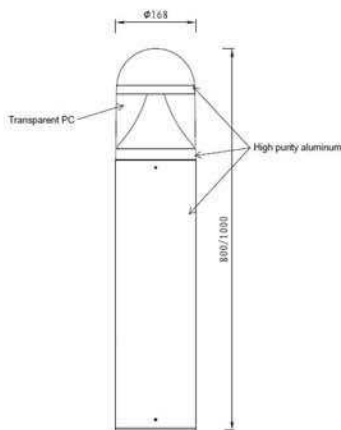

LED

3
YEARS
WARRANTY

CE

30000h

L 50
B 50

MacAdam
4

IP
65

Hg
0.0mg


IK
08

AREA OF USE

Walkways, Driveways, Pathways

| | A | B | C |
|-------|-----|-----|------|
| 71400 | 168 | 168 | 1000 |

| TYPE | CRI | LIGHT OUT | POWER | COLOR TEMP |
|-------|--------|-----------|-------|------------|
| 71400 | >70 Ra | 1650 lm | 25 W | 4000K |

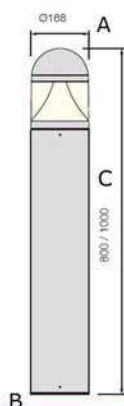




DESCRIPTION

Bollard lights are one of the most attractive lighting options available to homes and businesses for landscape lighting as they are offered in a variety of styles, colors, and materials. Whether you are looking to add attractive ambient lighting to your property, improve your home security by increasing visibility, or to mark walkways, driveways and pathways.


Certificates: CE/TÜV/RoHS

Color: Grey

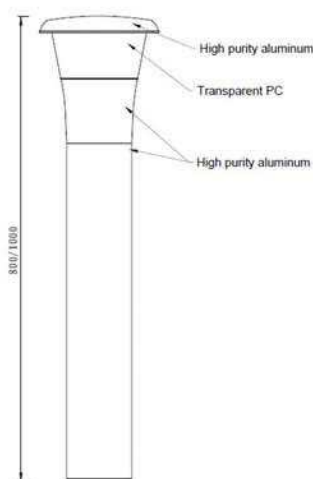

Installation template

| | A | B | C |
|-------|-----|-----|------|
| 71500 | 217 | 118 | 800 |
| 71510 | 217 | 118 | 1000 |

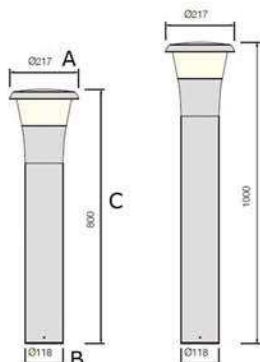

LED

3
YEARS
WARRANTY

CE

30000h

L 50
B 50

MacAdam
4

IP
65

Hg
0.0mg

IK
09

AREA OF USE

Walkways, Driveways, Pathways

CAN BE DELIVERED WITH

2700K/3000K/4000K/5700K

| TYPE | CRI | LIGHT OUT | POWER | COLOR TEMP |
|-------|--------|-----------|-------|------------|
| 71500 | >70 Ra | 840 lm | 12 W | 4000K |
| 71510 | >70 Ra | 840 lm | 12 W | 4000K |



DESCRIPTION

Decorative LED luminaire for 3-6 meters mast fitted with Osram 4DIM driver has both ENEC and VDE certificates. With the Osram 4DIM driver, the PARK LAMP is astronomical clock that automatically adapts day and night. With this function, the best savings are achieved with a night reduction of 50%
Energy class: A+

Beam angle: 360°

Certificates: CE/ENEC/VDE

Colors: Grey




AREA OF USE

Suitable for parking spaces, walking paths and parks

| | A | B |
|-------|-----|-----|
| 71800 | 635 | 500 |

| TYPE | CRI | LIGHT OUT | POWER | COLOR TEMP |
|-------|--------|-----------|-------|------------|
| 71800 | >80 Ra | 3000 lm | 30 W | 4000K |

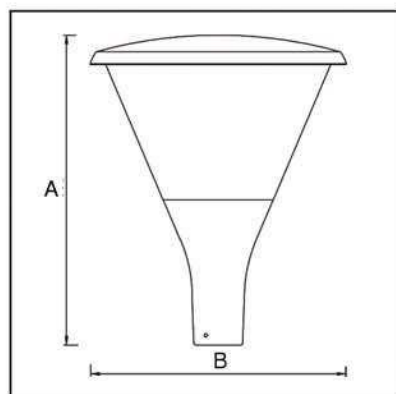


Pullert F

DESCRIPTION

Bollard lights are one of the most attractive lighting options available to homes and businesses for landscape lighting as they are offered in a variety of styles, colors, and materials. Whether you are looking to add attractive ambient lighting to your property, improve your home security by increasing visibility, or to mark walkways, driveways and pathways.

Certificates: CE/TÜV/RoHS

Color: Black

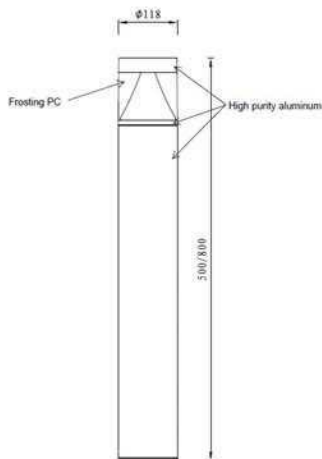

Installation template

| | A | B |
|-------|-----|-----|
| 71300 | 118 | 800 |

LED

3
YEARS
WARRANTY

CE

30000h

L 50
B 50

MacAdam
4

IP
65


Hg
0.0mg

IK
08

AREA OF USE

Walkways, driveways, pathways etc.

| TYPE | CRI | LIGHT OUT | POWER | COLOR TEMP |
|-------|--------|-----------|-------|------------|
| 71300 | >75 Ra | 800 lm | 9 W | 4000K |



DESCRIPTION

Outdoor floodlight for commercial signs, a classical European design with asymmetric light distribution
The floodlight can be mounted on the roof or wall.
Aluminium housing
Rod to be used for wallmounting: D. 20xL 495mm, aluminium.

Certificates: CE

Asymmetric beam angle
105°x90°

Colors: White/black



| | | | | | | | |
|-----|------------------|----|--------|-----------|------------------|-------|----------|
| LED | 3 YEARS WARRANTY | CE | 30000h | MacAdam 4 | 220-240V 50/60Hz | IP 65 | Hg 0.0mg |
|-----|------------------|----|--------|-----------|------------------|-------|----------|

AREA OF USE

Factories and warehouses etc.

CAN BE DELIVERED WITH:

3000K

| | A | B | C |
|-------|-----|-----|----|
| 71900 | 168 | 138 | 60 |

| TYPE | CRI | LIGHT OUT | POWER | COLOR TEMP |
|-------|-------|-----------|-------|------------|
| 71900 | 80 Ra | 2300 lm | 18 W | 3000-4000K |

DESCRIPTION

An integrated solution for floodlight and Arm

System Efficiency 120-130 Lm/W


Class II double isolation design

ADC12 die-casting Al body, stainless steel screws, good corrosion resistance.


Light source 32xLuxeon 3030

Certificates: CE/RoHS

Colors: Black

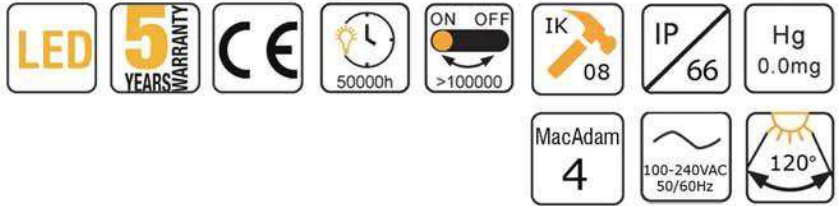

PHOTOMETRIC CURVE

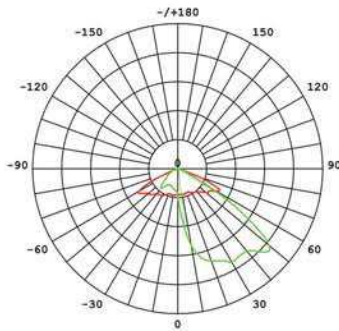

AREA OF USE

Suitable for general lighting and decoration lighting such as Garden, Building decoration, Billboard, Warehouse, Gas station, Tool Stations etc.

CAN BE DELIVERED WITH:

3000K/4000K/5700K

| TYPE | CRI | POWER | LIGHT OUT | COLOR TEMP |
|-------|--------|-------|-----------|------------|
| 71910 | >70 Ra | 16 W | 2000Lm | 4000K |

